

Article code: RIHAHCA16

Description: Selflock coupler easy
48-51 mm - black



Read manual
“clamps and coupler”
before use.



WARNING

- ADMIRAL Couplers and clamps shall only be installed or used by competent and/or qualified personnel.
- Do not exceed the maximum WLL (Working Load Limit) stated on the product.
- Couplers used in combined assemblies shall never exceed the maximum Safe Working Load of the assembly.
- Inspect equipment before every use. A damaged coupler or clamp shall be taken out of service.
- If clamps are used to support loads above persons it might be needed to secure the load with an additional safety cable (check local legislation).
- Do not overtighten bolts and nuts as this could lead to deformation of the chords of the support structure.


SELFLOCK COUPLER EASY 48-51 mm black

Article code:



RIHAHCA16

EAN code:

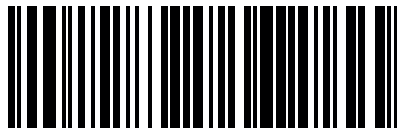

8720094421315



ADMIRAL
STAGING

| www.admiralstaging.com | Josink Kolkweg 10 | 7545 PR Enschede |
| The Netherlands | Tel: +31 53 4 301 201 |



ADMIRAL
STAGING

SELFLOCK COUPLER EASY 48-51 mm



Manufacturer:
Rolight Theatertechniek B.V.
Josink Kolkweg 10
7545 PR Enschede, The Netherlands
+31 53 432 06 44
info@rolight.nl
www.rolight.nl

Distributed by ADMIRAL



VERSION 01
JUNE 2023
SKU: RIHAHCA16

www.admiralstaging.com

HALF COUPLER



Ø 18 - 21 mm
WLL 10 kg



Ø 32 - 35 mm
WLL 75 kg



Ø 48 - 50 mm
WLL 100 kg



Ø 48 - 51 mm
WLL 200 kg



HALF COUPLER



Ø 48 - 51 mm
WLL 200 kg



Ø 48 - 51 mm
WLL 500 kg



Ø 48 - 51 mm
WLL 750 kg



Ø 58 - 61 mm
WLL 750 kg



HALF COUPLER HALFCONE



Ø 32 - 35 mm
WLL 50 kg



HALF COUPLER LIFTING EYE



Ø 48 - 51 mm
WLL 200 kg



HALF COUPLER SPIGOT MOUNT



Ø 48 - 51 mm
WLL 100 kg



SWIVEL COUPLER



Ø 48 - 50 mm
WLL 100 kg



Ø 48 - 51 mm
WLL 200 kg



Ø 48 - 51 mm
WLL 500 kg



ADMIRAL
STAGING

ADMIRAL CLAMPS AND COUPLERS

Admiral offers an extensive selection of clamps and couplers, ranging from aluminium Half couplers to Swivel couplers that can support a Working Load Limit (WLL) of up to 750 kg. All loads given are suitable for overhead lifting conform DGUV 17/18.

QUICK COUPLER



Ø 48 - 51 mm
WLL 250 kg



SELFLOCK COUPLER



Ø 48 - 51 mm
WLL 250 kg



C-CLAMP



Ø 50 mm
WLL 50 kg
lengths
23/40/60 cm



G-CLAMP



Ø 50 mm
WLL 50 kg

